


Now You See It...



Daylight

Now You Still See It!

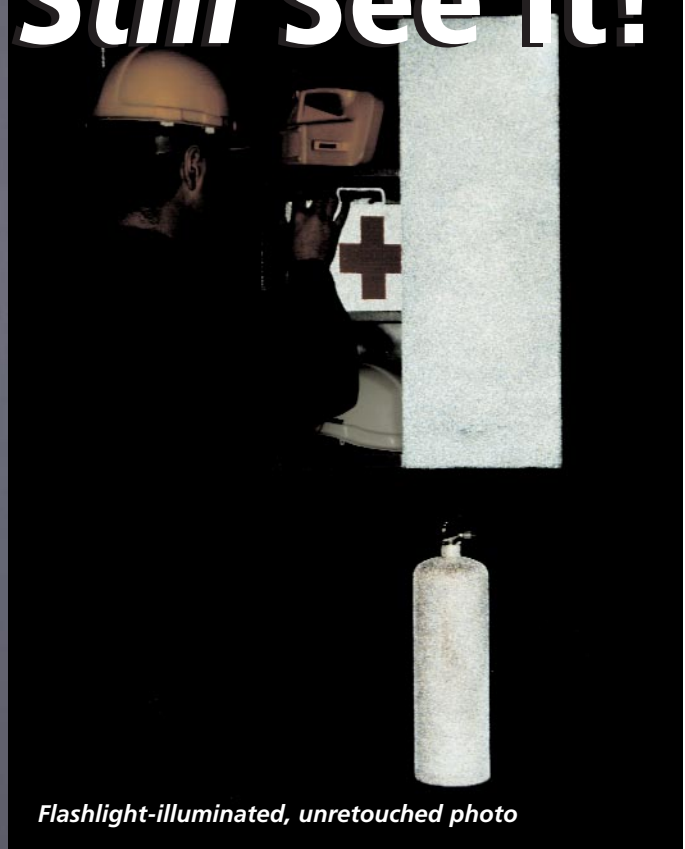

Flashlight-illuminated, unretouched photo




Improve Low-Light Visibility Without Changing Daylight Color

New! Krylon® Industrial REFLECT-A-LITE™ clear coating directly reflects flashlight or headlights back, making items extraordinarily visible in the dark or under emergency lighting conditions.

It's the first clear aerosol reflective coating that can be applied to virtually any item without obscuring its original color.

REFLECT-A-LITE paint can be applied to rough and complex shapes not suitable for expensive reflective films. For interior/exterior use on signs, exits, emergency equipment, step risers, hazard markers, obstructions, railings, and more!

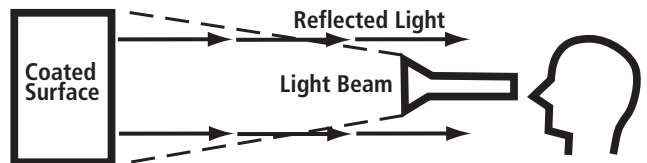

INDUSTRIAL


"NO RUNS, NO DRIPS, NO ERRORS!™"

Make Anything Highly Reflective!



Krylon® Industrial REFLECT-A-LITE™ paint is the industry's first clear aerosol reflective coating that can be applied to virtually any item without obscuring the original color of the substrate paint.

REFLECT-A-LITE (K09955) paint comes in 16-oz. cans (12-oz. net weight), in case packs of 12, and is available exclusively from Diversified Brands industrial distributors.




Excellent for making almost any surface extraordinarily reflective.

Surface Preparation

Surface must be clean and dry. Remove dirt, grease, rust, wax, etc. Bare metal should be primed.

Application

Shake can until ball rattles, then shake for another minute. Shake occasionally during use. **PLEASE NOTE: Product MUST BE MISTED on object from 18" to 24".**

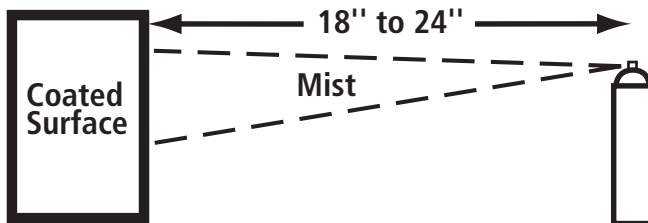

IMPORTANT: Mist on coating from 18" to 24" away.

Do not apply with a continuous spray. Mist on coating by moving back and forth, releasing button after each stroke and overlapping strokes. Do not apply in one heavy coat.

- For best results, use at room temperature 70°F-90°F (21°C-33°C).
- After spraying, turn can upside down and spray until clear gas comes out. If spray tip clogs, remove and clean with lacquer thinner. Do not insert pin or other sharp object into valve opening. Replace spray tip with valve opening pointed away from you. Replace cap for future use.
- Discard empty can in trash pick-up. Do not burn or incinerate.

Physical Properties

Product Number:	K09955
Product Type:	Acrylic Lacquer
Finish:	Satin
Net Weight:	12-oz.
Case Pack:	12
Drying Times @ 70°F @ 50% Relative Humidity:	
To Touch:	12 minutes
To Handle:	30 minutes
Max Hardness:	30 minutes
Coverage:	15-20 sq. ft.
Recoat:	Anytime
Temp Resistance:	<150°F
Application Conditions:	70°F-90°F @ 50% RH
Primer:	N/A
Gas & Oil Resistance:	Film softens after 15 min.
Clean-Up: Wet	Lacquer Thinner
Dry	Lacquer Thinner



INDUSTRIAL

"NO RUNS, NO DRIPS, NO ERRORS!™"

Tel: 800-925-3434 • Fax: 614-294-2956

www.diversifiedbrands.com

DISTRIBUTED BY: